

PRODUCT CATALOG

AMBERWOOD

DESIGNED HARDWOOD FLOORING



SOLID OAK AND ASH

- ↗ FLOOR BOARDS
- ↗ PARQUET
- ↗ SKIRTINGS



AMBERWOOD


DESIGNED HARDWOOD FLOORING

Amber Wood is a fast growing manufacturer of high grade hardwood flooring. The principal products are oak and ash floor boards, traditional parquet and skirting boards. The complete production line entails sawing hardwood logs, drying in specialized kilns, cutting boards to size using the most modern precision machinery, smoothing and, finally, treating the surface with oil.



FLOOR BOARDS

Surface of the boards is filled, sanded, with microbevels. Microbevels on the sides and the ends. Microbevels for 15 mm thick floor boards are 1 mm of width. For 21 mm thick floor boards 1 mm bevels on the ends and 2 mm wide bevels on the sides. Depending on the consumer request, floor boards can be oiled in 11 different colors with natural oxidative oil.

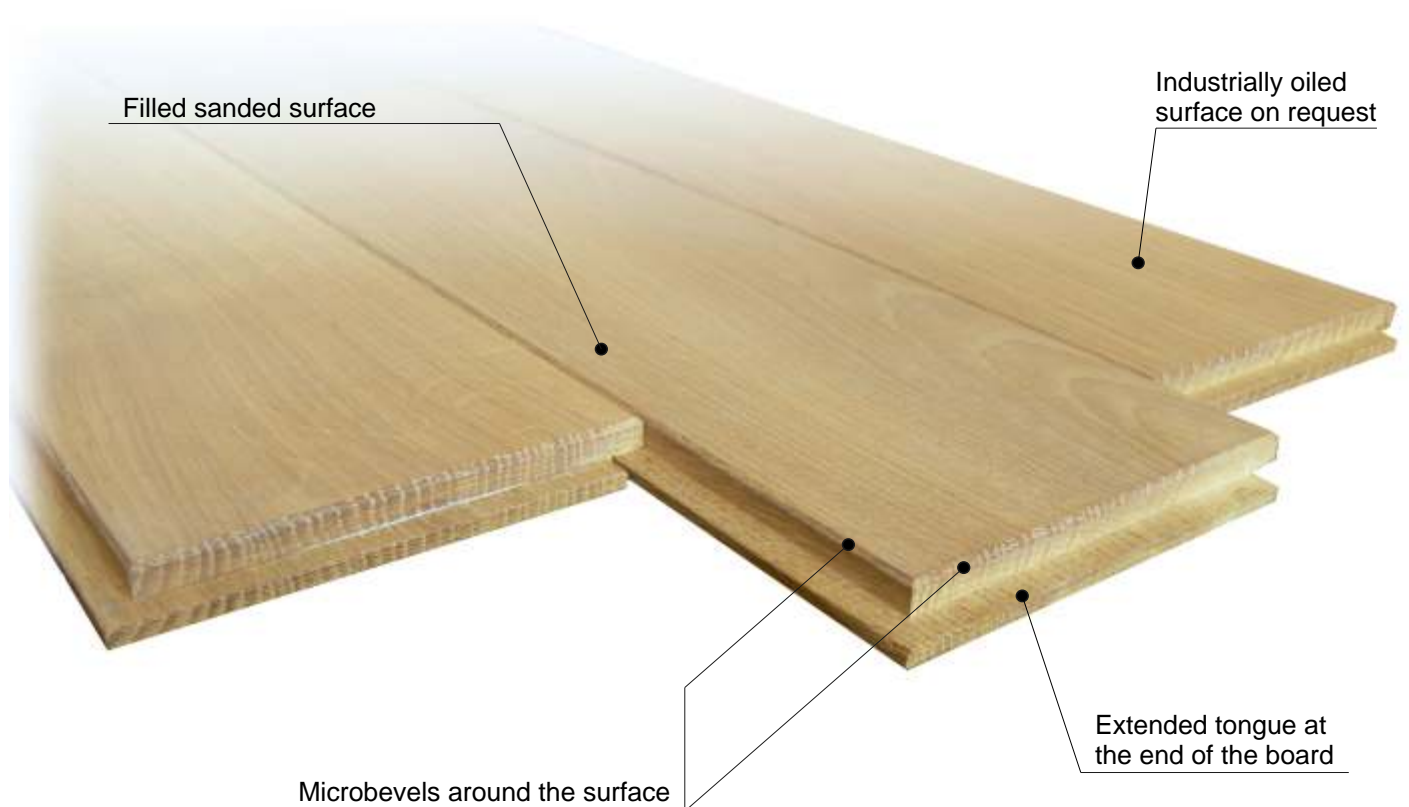



OAK FLOOR BOARDS



Premium
Knots up to 5 mm.



Select
Limited color variation
Knots up to 25 mm.



Classic
Natural color variation.
Knots up to 75 mm.



Rustic
Natural color variation.
Knots up to 75 mm.
Sapwood allowed.



ASH FLOOR BOARDS



Premium
Without knots.



Select
Natural colour variation.
Knots up to 25 mm.



Rustic
Natural colour variation.
Knots up to 40 mm.



FLOOR BOARD FINISHES

For industrial surface coating a high solid oxidative natural oil sealer is used. Upon a request from consumer, floor boards can be oiled in various colors.

ASH	Colour of oil	OAK
	Antique 200 - 581 - 2	
	Graphit Lite 200 - 870	
	Clear 299 - 002	
	Coral 200 - 516	
	Graphit 200 - 725	
	Havanna 200 - 517	
	Marone 200 - 808	
	Onyx 200 - 514	
	Sand 200 - 519	
	Tabac 200 - 518	
	White 1709	
	Unfinished wood	



OAK PARQUET



Exclusive
Without knots, limited color variation.






Natur
Natural wood colour, knots up to 5 mm.



Robust
Natural wood colour, sapwood allowed. Knots up to 10 mm.

Samples of few parquet flooring patterns.

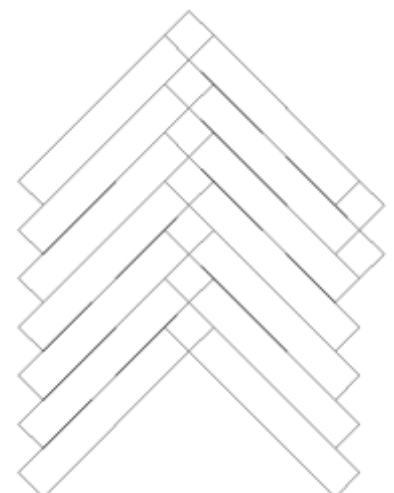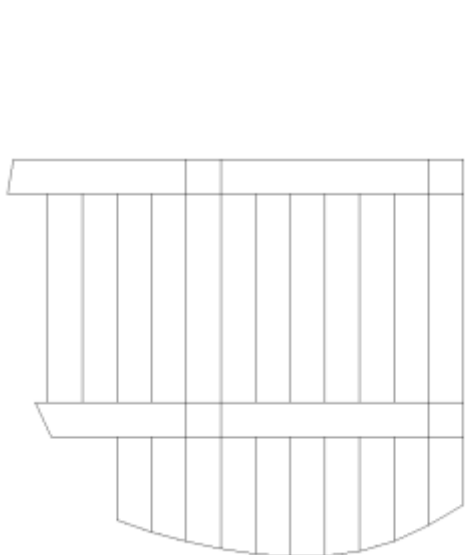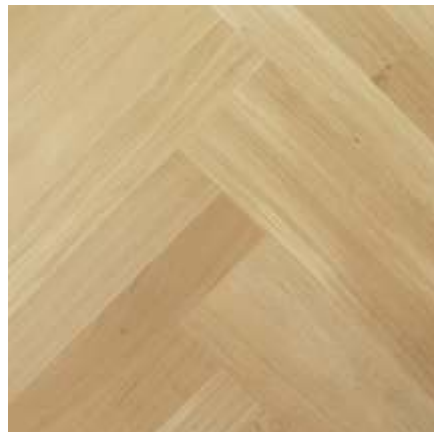

PRODUCT SPECIFICATION



FLOOR BOARDS (random length)

Moisture content: $8 \pm 1\%$

Geometrical characteristics: meets EN 13629:2003 requirements

Grades: Premium, Select, Classic, Rustic

Thickness, mm	Species	Width, mm	Length, mm
15	Oak, Ash	110*, 130, 160	600-2800
21	Oak	210	600-1400, 1400-3000
	Ash	130, 160, 180	600-1400, 1400-3000

* - minimum length 400 mm



TRADITIONAL PARQUET (fixed length)

Moisture content: $8 \pm 1\%$

Geometrical characteristics: meets EN 13226:2009 requirements

Grades: Exclusive, Natur, Robust

Thickness, mm	Species	Width, mm	Length, mm
16	Oak	68	204, 272, 340, 408, 476



SKIRTING

Geometrical characteristics:

thickness - fingerjointed 15 mm, solid 16 mm

length - fingerjointed 2500 mm, solid 1500-3000 mm

Grades: I - without knots

II - pinknots, natural wood color

III - knots up to 10 mm, sapwood allowed

Species	Height, mm	Solid/fingerjointed	Grade
Ash	50	solid, fingerjointed	I, II
	85	solid	I, II
Oak	50	solid, fingerjointed	I, II, III
	70	solid	I, II



AMBERWOOD
DESIGNED HARDWOOD FLOORING

Amber Wood Ltd
Address: V rnas, Jaunsvirlaukas pagasts, Jelgavas novads, LV3001
T.: +37127022220
F.: +37163058182
E-mail: info@amberwood.lv
www.amberwood.lv

© 2012 by Amber Wood
For reasons of printing technology, colours and structures may vary from the reproductions shown here.
Amber Wood reserve the right to make changes. No responsibility is assumed for errors.



The Latvian Chamber
of Commerce and
Industry